



PC Specifications

Product Description

VEXO polycarbonate base spikes are an effective, economical and maintenance free method to evict birds from an area. PC base spikes are constructed from a durable UV stabilised polycarbonate to withstand harsh conditions. Stainless steel spikes also resist UV degradation and chemical corrosion.

PC bases are extremely light weight, resilient and flexible.

Application

VEXO PC base spikes are suitable any domestic or small/medium areas, including pergolas, ledges, machinery, air conditioning units etc. Spikes are a humane method of deterring birds as they avoid the area entirely when they approach and see the spikes.

Support

VEXO spikes can be custom manufactured to suit unique projects.

Contact +61 3 9458 5118 for any assistance in solution evaluation and product recommendation. Free literature, catalogue and installation information is available.

Contact

Plascare (Aust) Pty Ltd
30 Culverlands Street, Heidelberg Heights, VIC, 3081, Australia
T + 61 3 9458 5118 F + 61 3 9817 2714

Part 1 General

1. Summary:

Install VEXO spikes on exposed surfaces to prevent damage and health hazards from bird droppings and nesting materials. VEXO spikes are a safe, visual deterrent to eliminate birds in the area.

2. Quality assurance:

- A. Standard: VEXO spikes are made in compliance with ISO9001. Every 30 metres of bird spikes undergoes extreme destructive test to ensure the weld and form quality is maintained.
- B. Installer Qualification: Obtain technical information from manufacturer and engage with certified installation companies who are fully skilled with VEXO products and carry proper insurance coverage.

3. Submittals:

Submit manufacturer's descriptive material including samples, literature, catalogues, product specifications and installation instructions.

4. Product handling:

VEXO spikes are packaged for fast and safe on site installation. Handle VEXO spikes from the base strip. Protect VEXO spikes from damage before, during and after installation.

If damage occurs to VEXO spikes, replace section immediately.

5. Warranty:

VEXO PC base spikes are warranted against defects in materials and workmanship for 10 years.

Part 2 Product

Material

VEXO PC2

Base: UV stabilized Polycarbonate;
Spike: #304 stainless steel.
Length: 500mm Height: 110mm
Width: 60mm Pitch: 50mm

VEXO PC4

Base: UV stabilized Polycarbonate;
Spike: #304 stainless steel.
Length: 500mm Height: 110mm
Width: 130mm Pitch: 25mm

VEXO PC6

Base: UV stabilized Polycarbonate;
Spike: #304 stainless steel.
Length: 333mm Height: 150mm
Width: 240mm Pitch: 27mm

Mounting system

Any substrate: adhere with professional MS-polymer adhesives.

Sheet metal surfaces: optional self-tapping stainless steel screws for added secureness.

Wood surfaces: optional wood screws for added secureness.

Part 3 Execution

Examination:

Examine the installation area. Notify architect/builder of detrimental work conditions. Do not process until

PC Specifications

conditions are corrected. Measure and check the correct length of spikes required for the area.

Surface preparation:

Surfaces should be dry and free of peeling paint, rust, excrements and debris.

Installation: Spikes should cover the complete ledge ensuring spike tips extend to the edge. It is acceptable to leave a 3cm gap between rows of spikes or from the back wall of the ledge.

Apply a row of adhesive along the underside of the

spike base, then place the spike onto the surface and apply moderate downward force to ensure maximum contact between spike, adhesive and surface.


Inspection:

Visually inspect VEXO spikes for inadequate adherence to surfaces, loose screws or interfering debris. Make any necessary repairs immediately.


Maintenance:

VEXO spikes, properly installed with suitable adhesive, need virtually no maintenance.

PC2

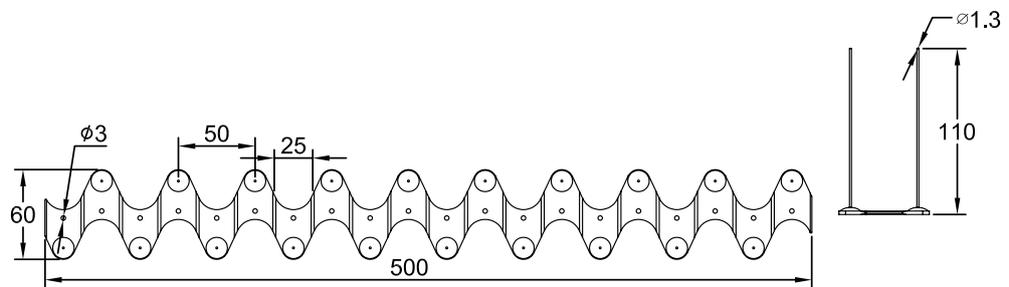

PC4

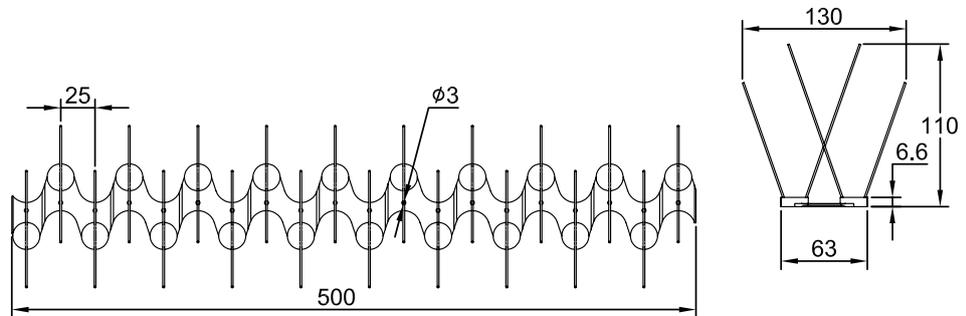

PC6

